

CQ REVIEWS:

The JRC JRL-2000F HF Linear Amplifier

BY PAUL CARR*, N4PC

Perhaps Japan Radio Company is best known for its commercial marine equipment, but they also have established themselves as a supplier of high-quality radio equipment for the amateur radio market.

The first thing that impressed me when I removed the amplifier from its carton was the nice, "clean" appearance. Not only should this please the amateur, but the XYL or OM as well. The equipment will look good either in a dedicated shack or in a room shared by the entire family.

An Overview

Now let's see some of the features claimed by this equipment. The JRL-2000F is a fully transistorized, fully automatic HF linear amplifier. The final, which has 48 RF power MOSFETs, has a rating of 1000 watts output at a 100%

Operating frequency bands:

Rated output power:

Output impedance:

Harmonics:

Intermodulation distortion (IMD):

Input impedance:

Exciting power:

Frequency switching time:

Power supply voltage:

Power consumption:

Input power factor:

Temperature range:

Protection circuits:

Dimensions:

Weight:

1.8, 3.5, 7, 10, 14, 18 & 21 MHz amateur bands.
(24 & 28 MHz bands: antenna tuner only)

SSB 1 kW PEP* 100% duty cycle, 24 hour.

CW 1 kW* 100% duty cycle, 24 hour.

FSK/SSTV 1 kW* 100% duty cycle, 1/4 hour.

50Ω unbalanced, VSWR 3.0 (16.7–150Ω)

–60 dB or less

–35 dB or less below PEP (at 1 kW output)

50Ω unbalanced

100W max.

Less than 0.1 sec.

85 to 264 VAC, single-phase

2.5 kVA or less (at 1 kW output)

95% or more (at 1 kW output)

–10° to 40°C

PA excess current; PA overheat; PA abnormal load; AC power supply excess voltage; power supply overheat; PA failure; excessive antenna VSWR; exciting power excess; and antenna matching anomaly.


Approx. 17"W × 12"H × 17"D

Approx. 62 lbs.

*Note: Rated output on 200–240 VAC. The rated output power on 100–120 VAC is 750 W PEP.

*97 West Point Rd., Jacksonville, AL 36265

Table I—Specifications of the JRC JRL-2000F linear amplifier.

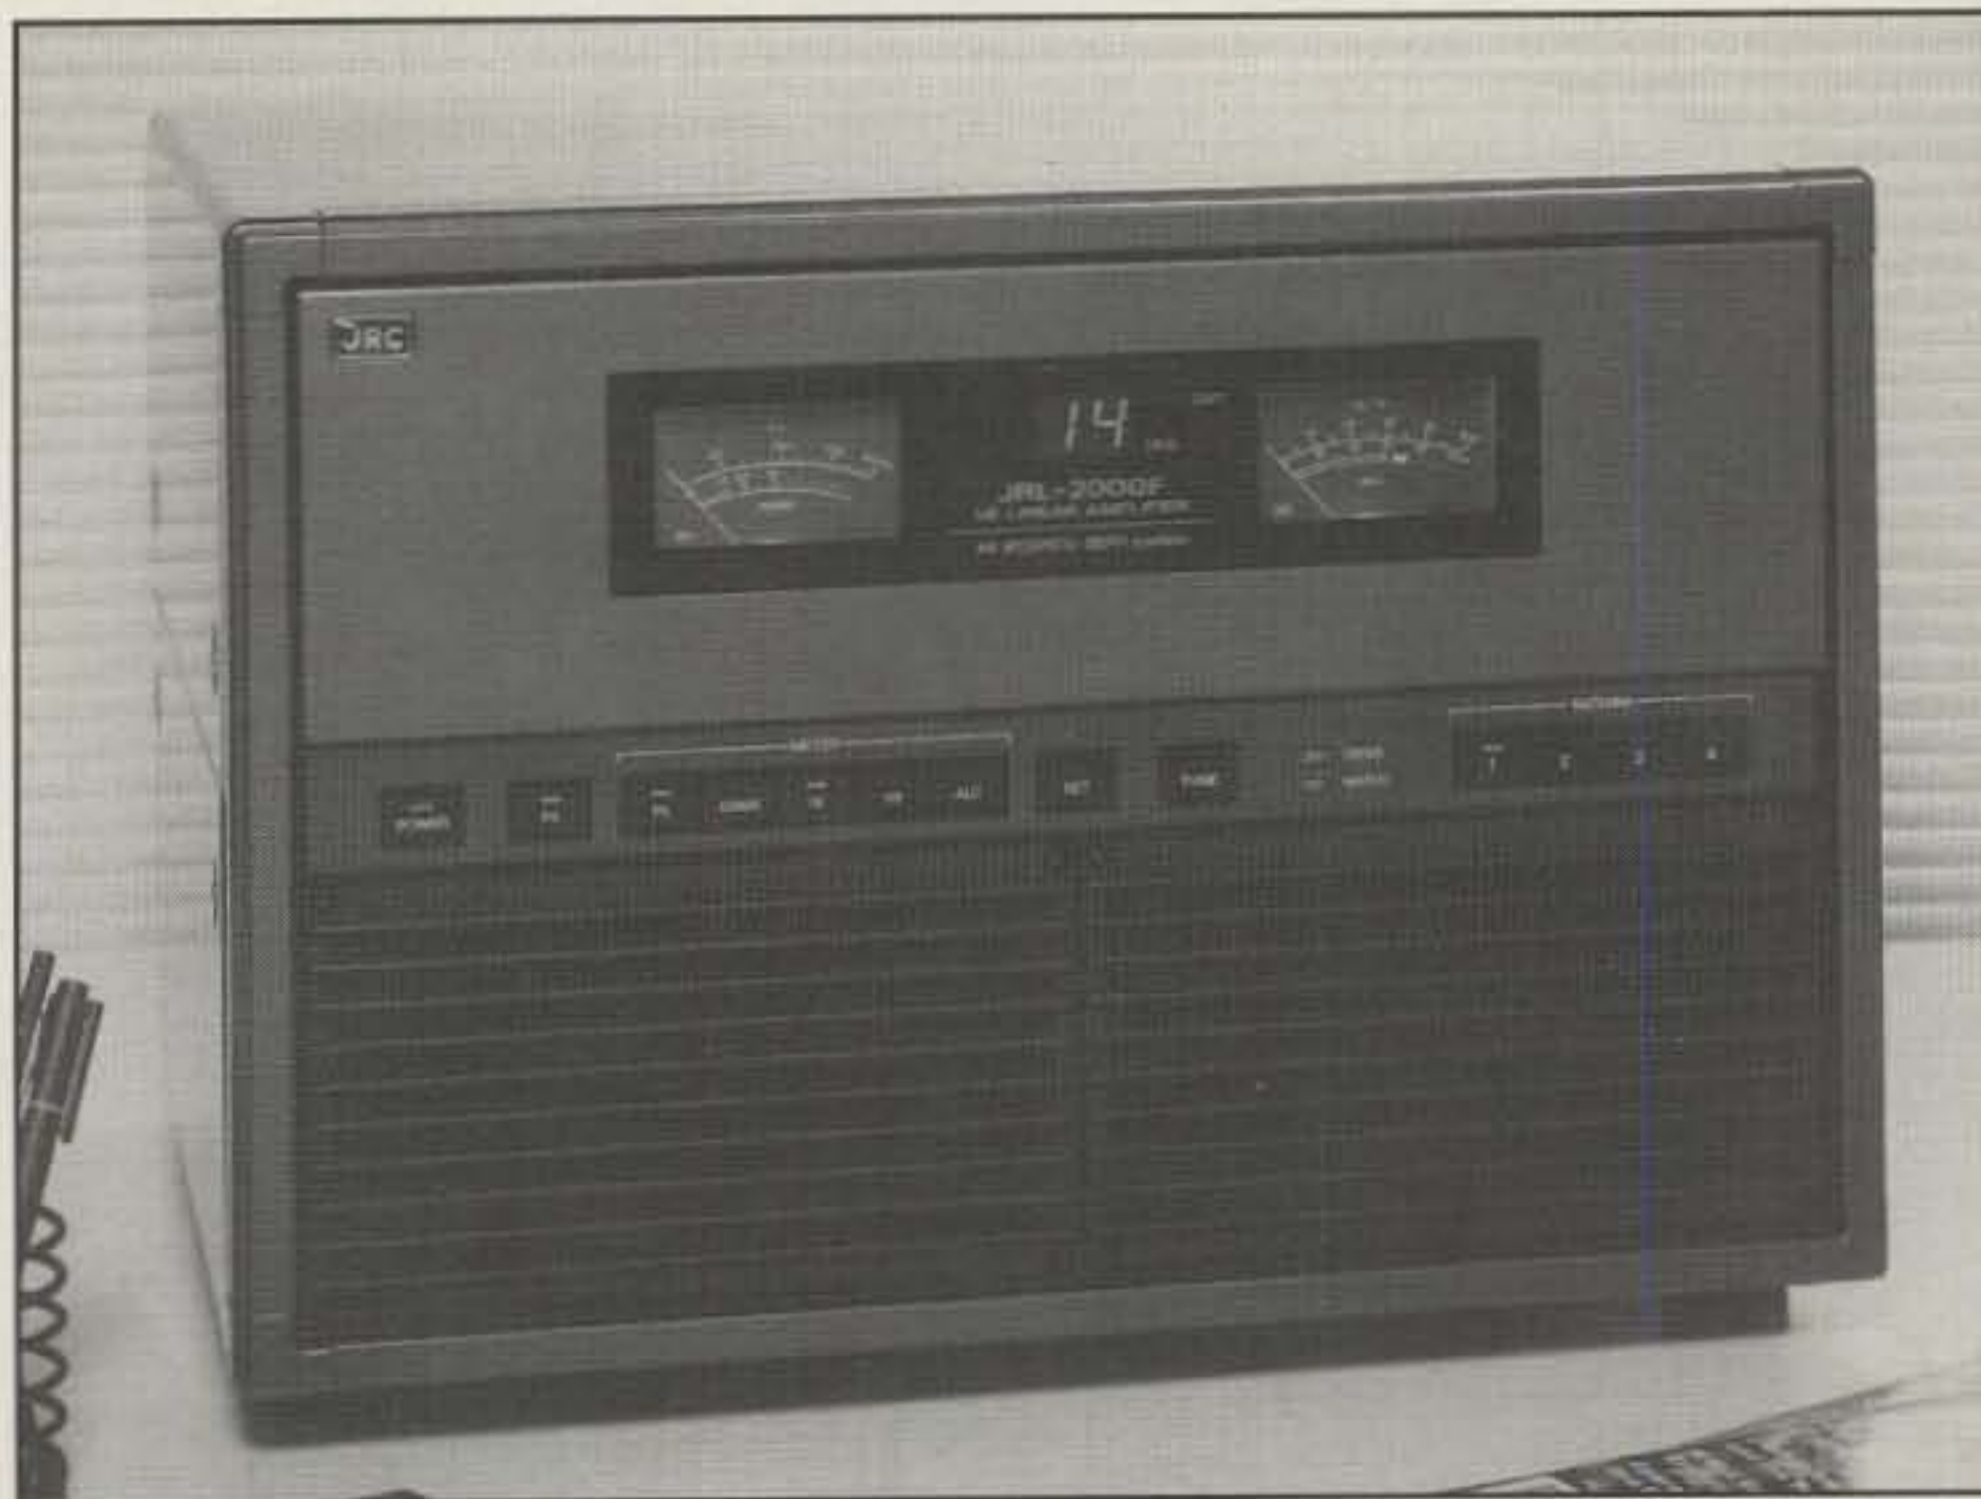

Front view of the JRL-2000F amplifier. The unit can be placed anywhere in the shack and remotely operated via the NCH-365 Controller.



Resembling a TV remote control, the NCH-365 Remote Controller allows you to check and change things as easily as you would switch TV channels.

ICOM

IC-728 HF Xcvr./Gen. Cov. Rcvr.	\$809.00
IC-729 HF/6-Meter Xcvr./Gen. Cov. Rcvr.	1169.00
IC-735 HF Xcvr./Gen. Cov. Rcvr.	949.00
IC-737 HF Xcvr./Gen. Cov. Rcvr.	1299.00
IC-751A HF Xcvr./Gen. Cov. Rcvr.	1249.00
PS-55 AC Power Supply	204.00
AT-150 HF Automatic Antenna Tuner	399.00
SM-8 Desk Microphone	96.00
SM-20 Deluxe Desk Microphone	133.00
SP-7 External Speaker	56.00
SP-20 Ext. Spkr. With Audio Filters	150.00
IC-R1 Communications Receiver	449.50
IC-R7000 Communications Receiver	1189.00
IC-R7100 Communications Receiver	1229.00
IC-228H 2-Meter, FM, 45 Watt Xcvr.	359.00
IC-229H 2-Meter, FM, 50 Watt Xcvr.	369.00
IC-2330A 2-Mtr./220-MHz, FM, 45W/25W	619.00
IC-2410H 2-Mtr./440-MHz, FM, 45W/35W	779.00
IC-3230H 2-Mtr./440-MHz, FM, 45W/35W	699.00
IC-2GAT 2-Mtr., FM, Handheld With T-T	334.50
IC-4GAT 440-MHz, FM, Handheld With T-T	299.50
IC-W2A 2-Mtr./440-MHz, FM, Mini H-H W/T-T	439.50
BP-4 Battery Case	19.00
BP-5 10.8 VDC, 425 mA., Ni-Cad Batt. Pack	71.00
BP-7 13.2 VDC, 425 mA., Ni-Cad Batt. Pack	85.00
BP-8 8.4 VDC, 800 mA., Ni-Cad Batt. Pack	85.00
CM-96 8.4 VDC, 1200 mA., Ni-Cad Batt. Pack	95.00
BP-83 7.2 VDC, 600 mA., Ni-Cad Batt. Pack	53.00
BP-84 7.2 VDC, 1000 mA., Ni-Cad Batt. Pack	81.00
BP-90 Battery Case	17.00
BC-35 Drop-In Rapid Charger; BP-2, 5, 7, 8	84.00
BC-72A Drop-In Chg.; BP-81, 82, 83, 84, 85, Int. ..	107.00
CP-11 Cigarette Lighter Cable W/Noise Filter	21.00
CP-12 Cigarette Lighter Cable W/Noise Filter	20.00
CP-13 Cigarette Lighter Cable W/Noise Filter	20.00
AD-12 External Power Adapter For IC-2GAT	27.00
HM-46 Speaker/Microphone	35.00
HM-54 Speaker/Microphone	51.00
HM-65 Speaker/Microphone For IC-W2A	37.00
HM-70 Speaker/Microphone For IC-W2A	39.00
HS-51 Headset, PTT & VOX	64.00
HS-60 Headset, PTT & VOX, For IC-W2A	71.00
UT-40 Encode/Decode/Beeper Unit	48.00
UT-50 Encode/Decode Unit	48.00

BENCHER

BY-1 Iambic Paddles, Black Base	\$64.95
BY-2 Iambic Paddles, Chrome Base	79.95

CUSHCRAFT

R5 14, 18, 21, 24, 28-MHz. Vertical	\$259.00
R7 7, 10, 14, 18, 21, 24, 28-MHz. Vertical	357.00
ARX-2B 2-Meter, Ringo Ranger II Vertical	47.00
ARX-220B 220-MHz, Ringo Ranger II Vertical	47.00
ARX-450B 450-MHz, Ringo Ranger II Vertical	47.00
AR-270 2-Mtr./440-MHz, Ringo Vertical	58.00
A50-5S 50 To 54-MHz, 5-Element Beam	116.00
124WB 144 To 148-MHz, 4-Element Beam	47.00
A147-11 146 To 148-MHz, 11-Element Beam	62.00
13B2 144 To 148-MHz, 13-Element Beam	95.00
224WB 222 To 225-MHz, 4-Element Beam	45.00
225WB 222 To 225-MHz, 15-Element Beam	95.00
A449-6 440 To 450-MHz, 6-Element Beam	38.00
A449-11 440 To 450-MHz, 11-Element Beam	55.00


ASTRON

RS-7A 13.8 VDC, 7 Amp Int., 5 Amp Cont.	\$49.50
RS-12A 13.8 VDC, 12 Amp Int., 9 Amp Cont.	71.50
RS-20A 13.8 VDC, 20 Amp Int., 16 Amp Cont.	88.50
RS-35A 13.8 VDC, 35 Amp Int., 25 Amp Cont.	141.50
RS-12M Same As RS-12A, With Meters	82.50
RS-20M Same As RS-20A, With Meters	108.50
RS-35M Same As RS-35A, With Meters	159.50
VS-35M Same As RS-35M, Adj. Volt./Curr.	171.50

UPS/Insurance Charges Are Additional
MC And VISA Orders Are Accepted
Prices Subject To Change Without Notice

LaRue Electronics

1112 GRANDVIEW STREET
SCRANTON, PENNSYLVANIA 18509
PHONE (717) 343-2124

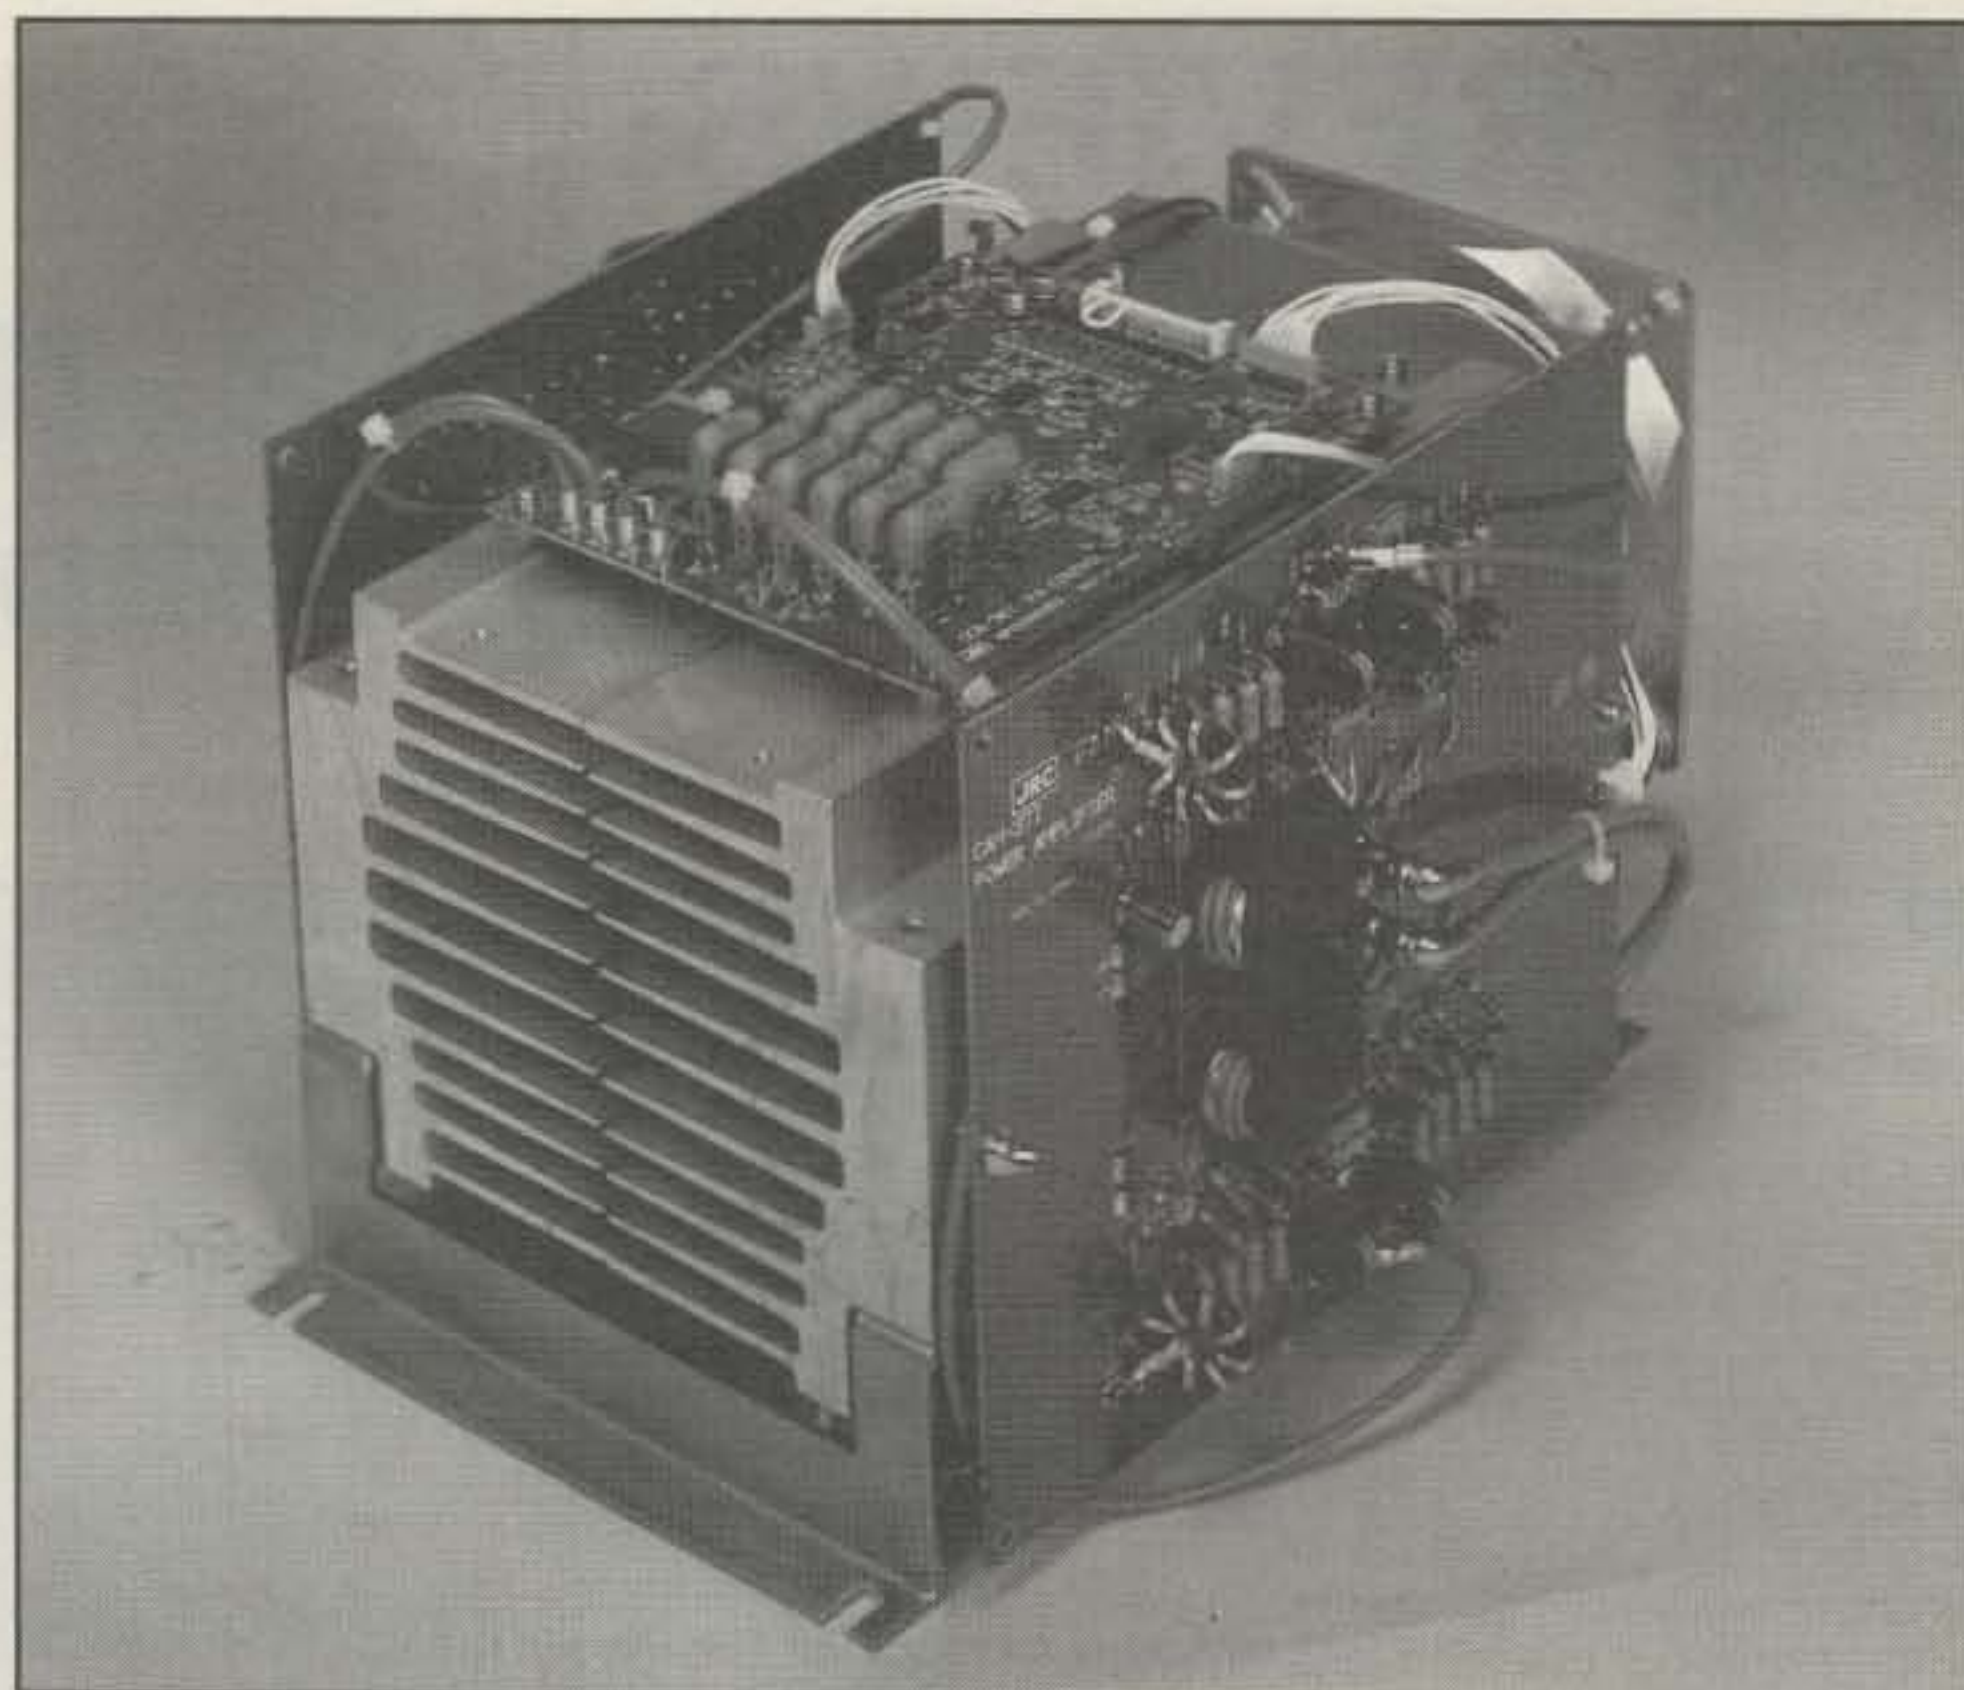

This is what the solid-state PA module looks like.

duty cycle (CW and SSB) for 24 hours. (Yes, I did say 24 hours.) The second feature that caught my eye was the built-in automatic antenna tuner. This tuner has a memory capacity of 1820 channels to provide for instant QSY. There is also a self-contained switching power supply (input voltage 80 to 264 VAC). Additionally, there are provisions for connecting four antennas that are instantly selectable by panel-mounted push-button switches.

Think you have heard everything? Not quite. There is also a remote-control unit very much like a TV remote, which allows you to mount the unit anywhere in the ham shack if you so desire.

Specifications

Table I lists the electrical and physical specifications of the JRC 2000F. The


unit will develop full output power on all amateur bands from 160 meters to 15 meters. On 12 and 10 meters, only the automatic antenna tuner is functional as shipped. I found no condition where these published specifications were not met or exceeded. The amplifier can be made to operate on 12 and 10 meters by following instructions supplied by JRC. These instructions will be supplied only after receipt of a copy of a valid amateur license for those bands.

Procedure

Any HF transmitter or transceiver with a 50 ohm output impedance can be used as an exciter for the JRL-2000F. I used the Japan Radio Co. JST-135 HF transceiver and the prefabricated interconnect cable provided, but that isn't necessary. If the maximum output of the



An interior view of the antenna switching network.

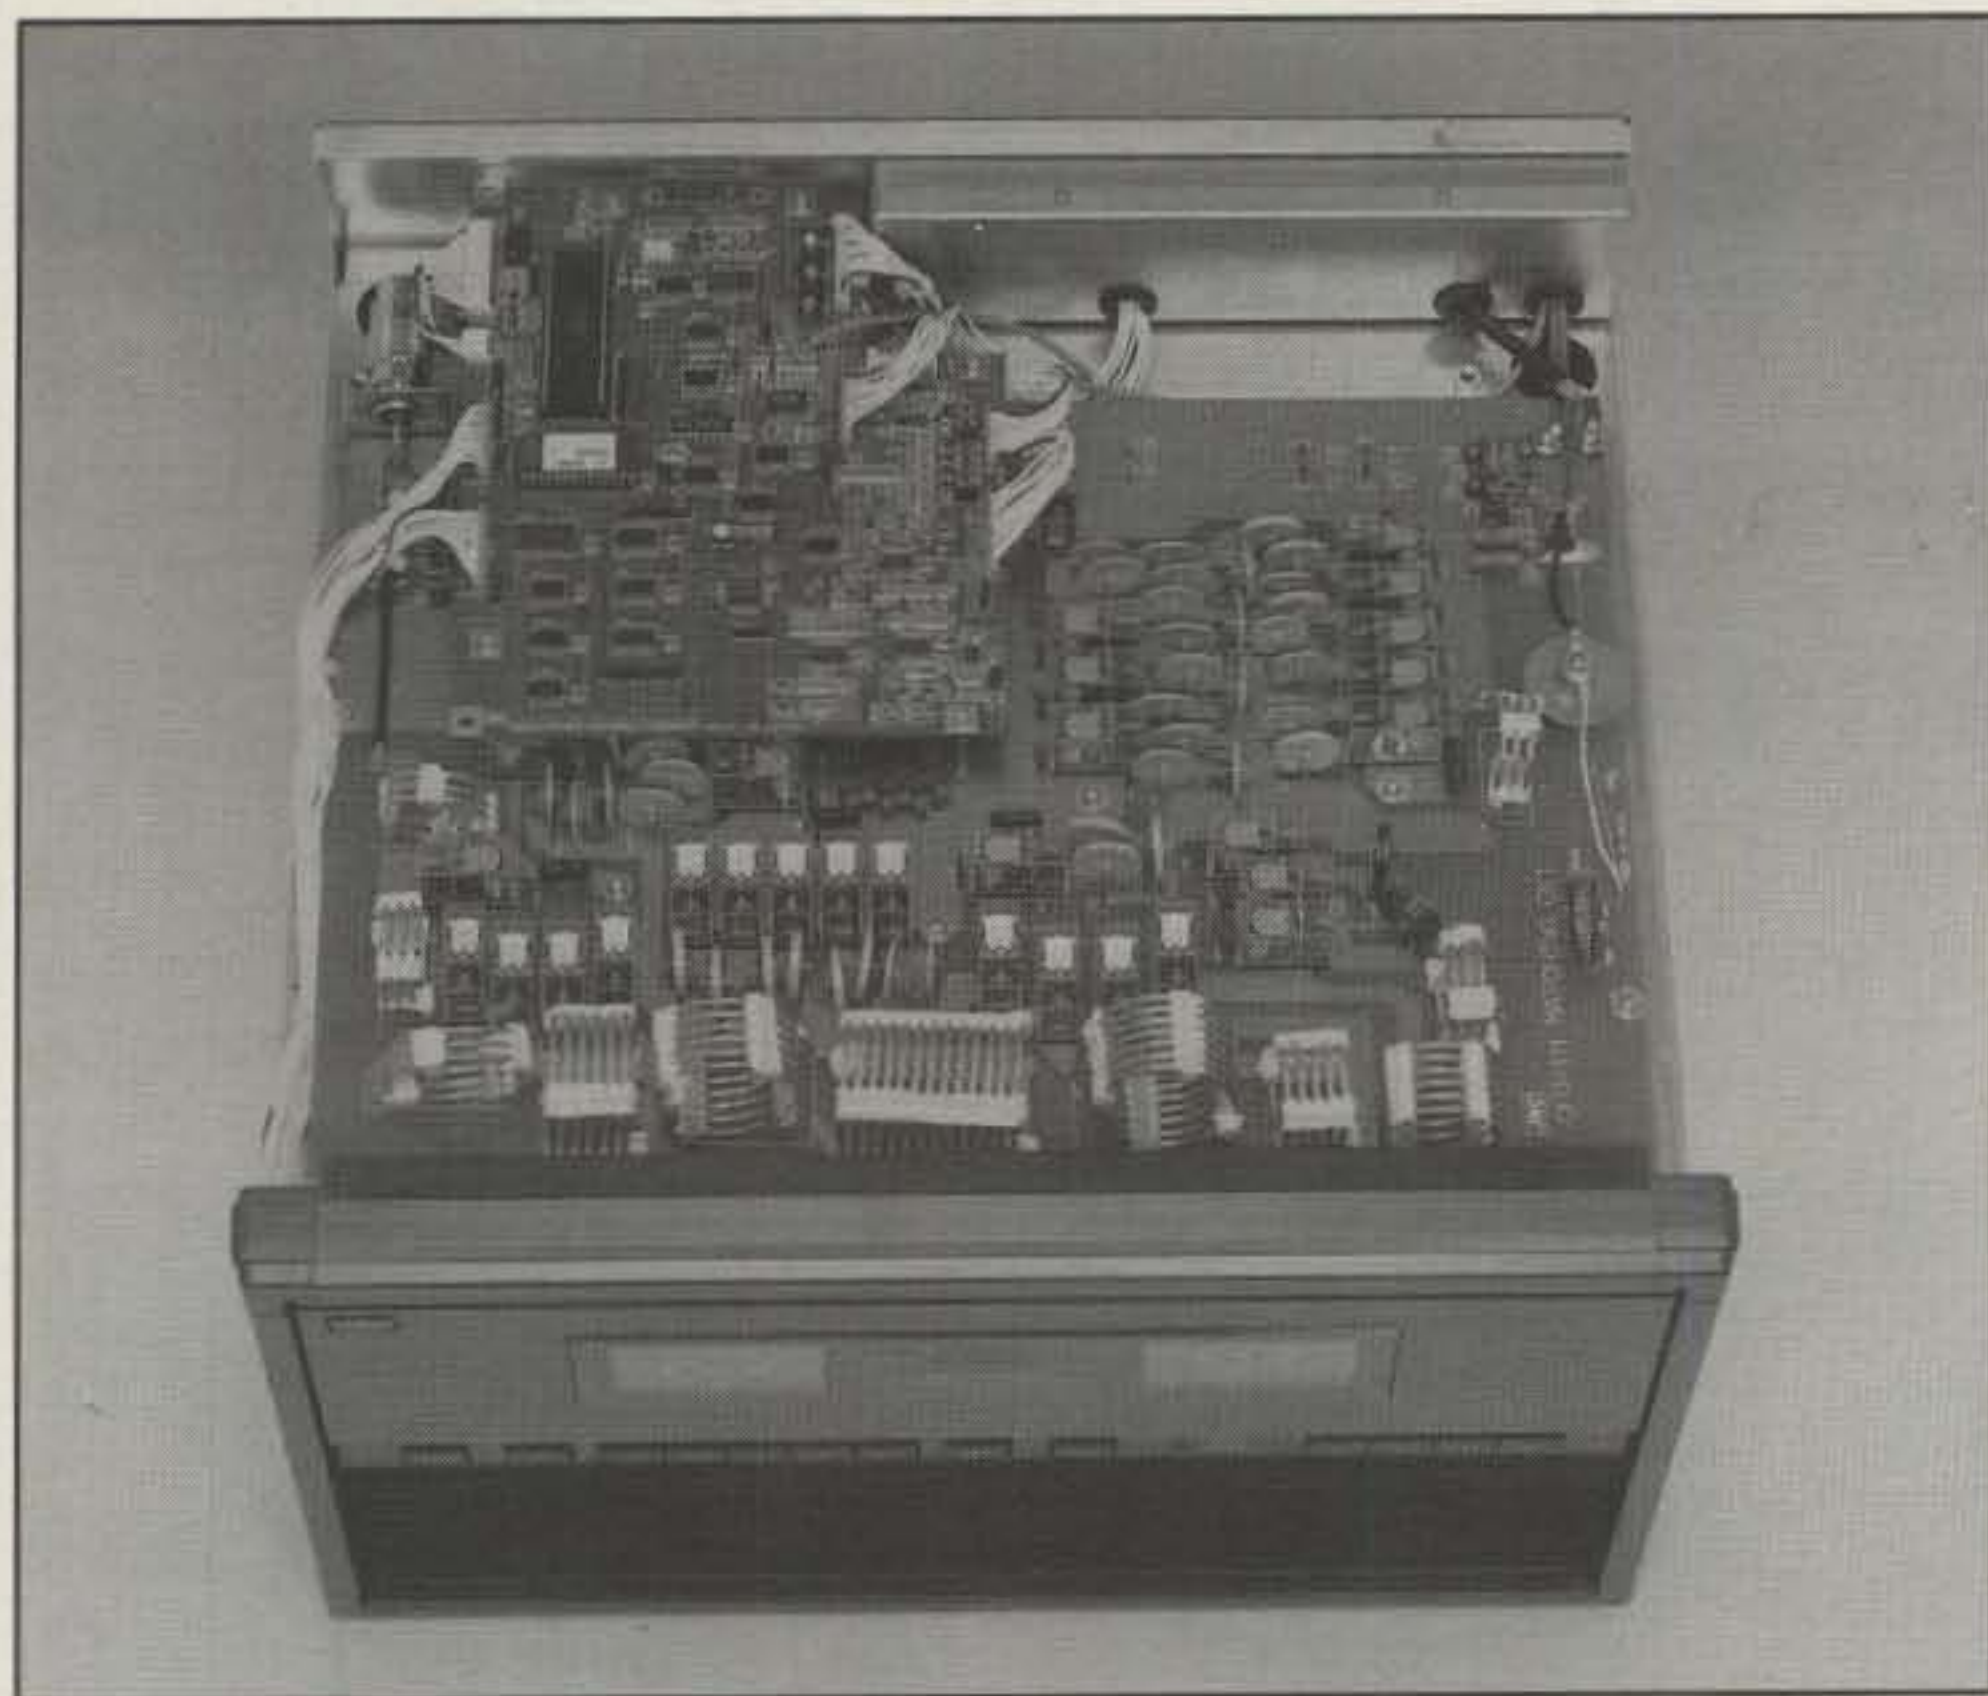

If you were to remove the top cover, you would see the matching network.

exciter exceeds 100 watts, the over-current circuit in the power supply may be activated and distortion may result. Be sure that the ALC control line is connected so the exciter output does not exceed proper limits.

There are provisions for four separate antennas. These antennas should have an impedance between 16.7 and 150 ohms to stay within the limits of the automatic antenna tuner (VSWR of 3:1 or less).

If the exciter is a JST-135, simply connect the prefabricated cables as shown in the instruction booklet. If your exciter is different, there are clear instructions to show proper procedures for making all necessary connections.

Perhaps a brief synopsis of the front-panel controls is in order.

Power Switch: Turns the main power on and off. When the power is on, the LED is lit and the automatic antenna tuner will function. When power is off, the antenna switches will function, but the amplifier or automatic antenna tuner will not function: straight-through operation is possible.

PA Switch: This turns on the power for the power amplifier. If the LED is not lit and the power switch is on, the automatic antenna tuner will function and the power amplifier will operate.

There are two conventional meters on the front panel, both functioning as switched multimeters. The left meter is switched to indicate VSWR or power output. The right meter can be switched

to read drain current, drain voltage, or ALC. Between the two meters there are two eight-segment readouts to indicate band of operation or other functions during the tune-up procedure.

Tune Switch: Automatically tunes the antenna and stores the matching data in memory. An associated LED is lit during the procedure. There is also a drive indicator. If the light is green, the drive level is okay; if the light is orange, the amplifier is being overdriven by the exciter. Simply reduce the drive power.

The Remote-Control Unit

As indicated earlier, there is a remote-control unit (very similar to a TV remote-control unit) which has the same functions as the controls on the front of the amplifier. This allows the amplifier to be placed across the shack if desired while retaining full control at the operating position. It's a great "lazy ham" device.

Operator Conveniences

This is the first completely computer-controlled amplifier I have had the pleasure to operate, and to say I was impressed would be an understatement. As stated earlier, I found no place where the specifications were not met or exceeded. For example, I operated the amplifier with 115V input to the power supply. The rated output from the unit is 750 watts PEP under this condi-

tion. I am happy to report that the test unit easily exceeded the rating.

Another test which is difficult to quantify was the test for TVI. My QTH is in the country about 65 miles from two VHF TV channels that I watch (there is no CATV at this location). My $\frac{3}{4}$ wavelength 80 meter loop is located about 15 feet above my TV antenna. I use this antenna for TVI tests. If there are any problems, they should show up under these conditions. I am happy to report that the test showed only a slight flicker on a TV set located in the ham shack with the meter on the amplifier peaking at 500 watts output. That test was very impressive! Additionally, many unsolicited reports indicated a "clean" signal with plenty of punch.

The many built-in fault protection circuits make it almost impossible to put out a bad signal. The computer-controlled unit makes many critical decisions for you. You just sit back and enjoy the results!

The unit is available from Japan Radio Company, Ltd., 430 Park Ave. 2nd floor, New York, NY 10022. The price class is \$4900. This is a very impressive piece of equipment. ■

SGC


BASE STATION ANTENNA

HF SSB ANTENNA
50Ω BROADBAND

Model SG-103 and SG-103T

Continuous Frequency Coverage

For commercial and professional base station services or tactical operations. The special SG-103T tactical version can be deployed and erected in less than 10 minutes. Both are supplied with all installation items.

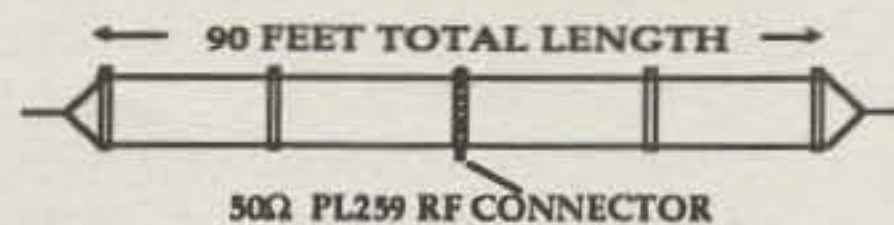

HIGH RADIATING PERFORMANCE

1.8-30 MHZ RANGE
3 to 6 DB GAIN
(above 6 MHz)

\$195.00

Low receiving noise
Low VSWR typical below 2:1
90 Feet overall length

SGC, Inc., Box 3526
Bellevue, WA 98009 USA
Tel: 206-746-6310
Fax: 206-746-6384

(SG103T quoted on request)

Visa & Master card accepted